

Unit 4
The Reservation
Sleaford Enterprise Park
Sleaford
Lincolnshire
NG34 7BY

www.shdcomposites.com
Tel +44(0)1529 307629
Fax +44(0)1529 306990
sales@shdcomposites.com



LTC216-3

Epoxy Tooling Prepreg

Introduction

LTC216-3 Prepreg is designed to cure at low temperatures whilst giving the potential for high temperature tooling. Typical initial cure cycles are 50 hrs at 45°C or 18 hrs at 55°C, followed by a 200°C post cure. LTC216-3 can be supplied on a variety of fabrics to meet your cost and manufacturing requirements.

LTC213-3 is a longer outlife variant of the standard LTC216 system.

Product variants: *LTC216-3B* *Black pigmented, default on all glass reinforcements*

Typical applications: *Low CTE tooling*

Key Features & Benefits

- Cure temperature from **45°C to 70°C**
- Service temperature up to **210°C** after post cure
- Low CTE and shrinkage
- Work life at 20°C: **8 days**
- Storage life at -18°C: **12 months**
- Very low VOC content – no added solvents during manufacture
- Excellent handleability in warmer conditions

Available Reinforcements (standard)

Carbon Surface ply	– 200g/m ² 2x2 twill		
Carbon Bulk ply	– 650g/m ² 2x2 twill	For standard 1:8:1 layup	Laminate thickness ~5.5mm
	– 1000g/m ² 2x2 twill	For 1:5:1 layup	Laminate thickness ~5.3mm
Glass Surface ply	– 300g/m ² 8 harness satin		
Glass Bulk ply	– 870g/m ² 2x2 twill	For standard 1:8:1 layup	Laminate thickness ~5.2mm

Note – other reinforcements available on request. Please enquire for details.

Issued 06th August 2019

Note: The information and assistance provided herein is for your consideration without legal responsibility. Users are required to perform verification and testing to confirm that the product meets with their requirements.

Unit 4
The Reservation
Sleaford Enterprise Park
Sleaford
Lincolnshire
NG34 7BY

www.shdcomposites.com
Tel +44(0)1529 307629
Fax +44(0)1529 306990
sales@shdcomposites.com



Storage & Out Life

This material should be kept frozen at -18°C. It must be kept sealed in a polythene bag which must not be opened until fully thawed to room temperature. If the material is not fully used, then the material must be resealed in the polythene bag to prevent moisture absorption.

Cure Cycles & performances

Temperature	Duration	Tg
45°C (minimum)	50 hours	55°C
55°C	18 hours	65°C
60°C	10 hours	70°C
70°C (maximum)	5 hours	80°C
200°C Post cure	8 hours	220°C

- Curing Schedule is meant to be a guide only and is subject to local conditions.
- To avoid exotherm particular care must be taken with thick laminates.
Ramp rates must not exceed **1.0°C** per minute during **initial cure**.
Ramp rates must not exceed **0.3°C** per minute during **post cure** (free standing).

Volatile content	< 1.0%
Fibre volume fraction	50 to 60%
Voidage (autoclave cure)	< 1.0%


Issued 06th August 2019

Note: The information and assistance provided herein is for your consideration without legal responsibility. Users are required to perform verification and testing to confirm that the product meets with their requirements.



Viscosity Profile

Measured using a rotational rheometer

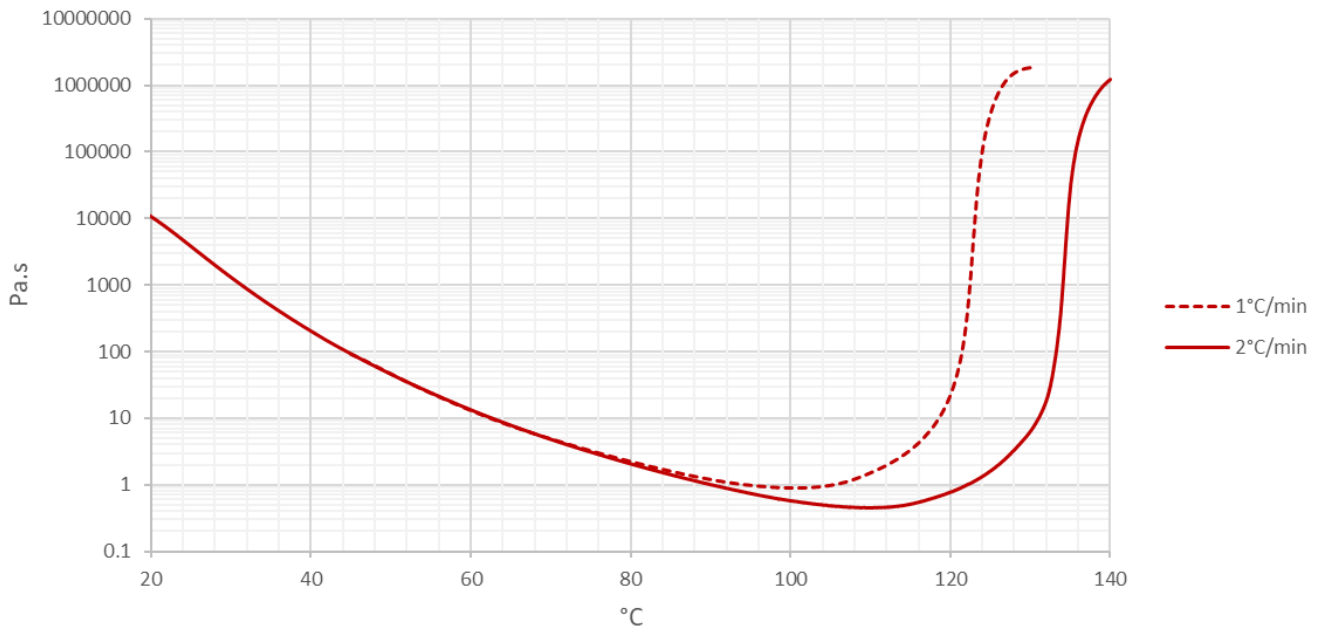

Health and Safety

This material contains epoxy resin which can cause allergic reactions with skin contact and must avoid repeated and prolonged skin contact.

Please refer to the product Safety Data Sheet before using this material. The following precautions must be taken when using epoxy resin prepregs:

- Overalls must be worn.
- Impervious gloves must be worn.
- Curing schedule is meant to be as a guide only and is subject to local conditions.
- To avoid exotherm, particular care must be taken with thick laminates.
- Ramp rates must not exceed 1.0°C/min during initial cure and 0.3°C/min during post cure.

SHD Composite Materials Ltd cannot accept any liability for injury or damage where the above precautions have not been taken or where the material is used for any purpose other than its intended use.

Issued 06th August 2019

Note: The information and assistance provided herein is for your consideration without legal responsibility. Users are required to perform verification and testing to confirm that the product meets with their requirements.