

# SHD GROUP

## Global Reach — Customer Focus

SHD Group is a global manufacturing business with sites in the UK, US and Europe.

We manufacture a wide range of tooling and component prepregs suitable for autoclave, press and oven curing. Having both hot melt fabric laminating lines and a Uni-Directional machine, together with our Research and Development facility, the continuous development of existing and future materials remains at the core of our philosophy.

Our fully equipped test laboratory and application centre allows us to carry out mechanical testing, thermal analysis and rheometry for internal product development and prototyping.

We pride ourselves in our ability to work with each customer to provide the right product for every application and to provide market-leading technical product support.

With a core team with over 30 years' experience in the composites industry, and accredited to AS9100 Rev D and ISO9001:2015, we are ideally placed to provide high quality materials at short lead times together with excellent service and first class technical support. Our recent growth has strengthened our capacity to meet the prepreg requirements of any order size or contract to support a variety of market sectors and applications worldwide.

## Global reach



## Reasons why composite engineers choose us:

- 01** Cutting edge advanced composite technology
- 02** Manufacturing centres in UK, Slovenia and USA
- 03** Exceptional levels of service and flexibility
- 04** Technical centre with state-of-the-art research and development facilities
- 05** World class technical support
- 06** Accredited to AS9100 quality standard
- 07** Capability to manufacture material up to 1.5m wide



## SHD COMPOSITE MATERIALS

October 2021

EN

Accredited to AS9100 Rev D and ISO9001:2015 at our three manufacturing sites.

EN 9100  
BUREAU VERITAS  
Certification



[shdcomposites.com](http://shdcomposites.com)

- SHD Composite Materials Ltd
- @SHDcmltd
- SHD Composite Materials Ltd


### Advanced Technology

Developed with extensive composite industry experience and expertise, we manufacture a wide range of tooling and component prepreg materials, suitable for a variety of global market applications and sectors.




### Flexible Service

The service that you receive is a fundamental part of your customer experience. That is why we offer unrivalled flexibility and technical support from our team of composites experts.

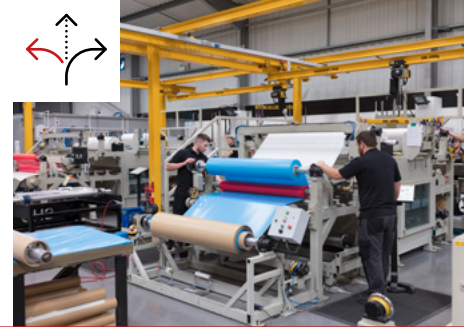

### Research & Development

With a dedicated technical centre to facilitate the development of new and innovative products, our team work closely with our customers to ensure you have the optimum materials for your requirements.

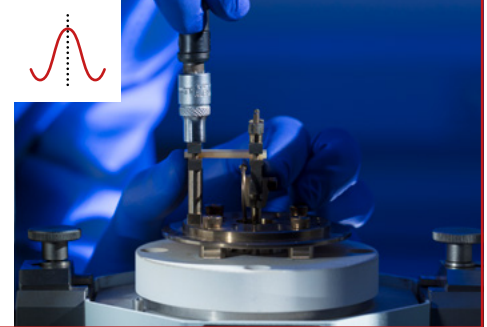

## GET IN TOUCH

SHD Composite Materials  
[shdcomposites.com](http://shdcomposites.com)  
+44 (0)1529 307 629  
[enquiries@shdcomposites.com](mailto:enquiries@shdcomposites.com)

- SHD Composite Materials Ltd
- @SHDcmltd
- SHD Composite Materials Ltd

Unit 4, The Reservation  
Sleaford Enterprise Park  
Sleaford, UK, NG34 7BY

**Sport & Leisure**




**Automotive**



**Aerospace & Rail**



**Motorsport**

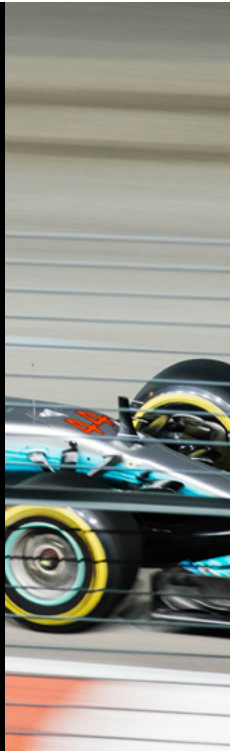

**Marine**



**Renewable Energy**



**Industrial**



**Defence**



**UAV**





# Product Selector Guide

Resin System	Description	Outlife at 20°C (Days)	Initial Cure Temp (°C)	Initial Cure Time (Hours)	Post Cure Option	Max Tg Onset* (°C – DMA)	Max Tg Peak* (°C – DMA)	Toughened	Standard Process	Typical Application Areas
<b>TOOLING PREPREG – Low Temperature Cure</b>										
LTC102	Epoxy Carbon/Glass Tooling	3	30 – 65	45 – 5	Yes	214	232	No	Autoclave	Commercial low temp tooling
LTC210	Epoxy Carbon/Glass Tooling	4	45 – 70	40 – 4	Yes	202	221	No	Autoclave	Commercial low temp tooling
LTB310-1	Epoxy Carbon/Glass Tooling – 30% bio-based	4	45 – 70	40 – 4	Yes	201	230	No	Autoclave	Commercial low temp epoxy tooling with 30% bio content
LTC216-3	Epoxy Carbon/Glass Tooling	7	45 – 70	50 – 5	Yes	218	242	No	Autoclave	Aerospace low temp tooling
LTC410	Epoxy Long Outlife Tooling	21	65 – 80	16 – 4	Yes	192	218	Yes	Autoclave	Long outlife, toughened, low temp Aerospace tooling
LTC400	Epoxy Long Outlife Tooling	30	65 – 80	24 – 6	Yes	207	228	No	Autoclave	Extra long outlife, low temp Aerospace tooling
OTS65	Epoxy Oven Cure Tooling	Up to 21	65 – 90	Consult Data Sheet	Yes	129	143	No	Oven	Out of Autoclave tooling & structures
BX180-220	Benzoxazine Tooling	12 months	180	2	Yes	229	250	No	Autoclave	High temp Aerospace tooling
BMI-1SC	BMI Tooling & Component	30	185	2	Yes	350	355	Yes	Autoclave	High temp, high durability Aerospace Tooling
<b>ADHESIVE FILM</b>										
MTFA500	Adhesive Film	30	80 – 120	16 – 1	No	141	150	Yes	Autoclave	General purpose film adhesive
VTFA400	Adhesive Film	21	65 – 120	16 – 1	Yes	135	147	Yes	Autoclave	General purpose film adhesive with versatile cure
MTFA400	Adhesive Film, High Temperature Service	28	80 – 150	16 – 1	Yes	170	190	Yes	Autoclave	General purpose, higher service temp
<b>COMPONENT PREPREG – Low to Medium Temperature Cure</b>										
LTC250-2XL	Low Temp Cure	5	50 – 75	40 – 4	Yes	130	144	Yes	Autoclave/Oven	Lower temp cure with good toughness and visual clarity. Excellent for low cost prototypes
MTC510	Med Temp Cure, Cosmetic & General Purpose	30	80 – 120	16 – 1	No	140	148	Yes	Autoclave	General purpose system also with excellent optical clarity for cosmetic carbon parts
MTC275	Med Temp Cure, Out of Autoclave	30	80 – 120	16 – 1	No	121	135	Yes	Autoclave/Oven	General purpose system also with excellent optical clarity for cosmetic carbon parts. Can process OOA
MTC475	Med Temp Cure, High Service Cosmetic	30	80 – 120	16 – 1	Yes	190	206	Yes	Autoclave	Higher service temp system with good visual finish
MTC811	Med Temp Cure, Core Bondable	60	90 – 120	14 – 1	No	121	128	Yes	Autoclave	Highly toughened system for structures requiring good damage tolerance and impact performance
MTC400	Med Temp Cure, High Temp Structural	30	80 – 135	16 – 1	Yes	227	238	Yes	Autoclave	High service temp (typically up to 180°C) components in Motorsport, Automotive and Aerospace. 160°C wet Tg
MTC400-1	Med Temp Cure, High Temp Structural	30	80 – 135	16 – 1	Yes	207	224	Yes	Autoclave	Higher service temp (typically up to 150°C) structural components in Automotive and Motorsport
MTC412	Med Temp Cure, High Temp Service OOA	28	80 – 150	16 – 1	Yes	170	190	Yes	Autoclave/Oven	High service temp and Out of Autoclave processing typically for Aerospace applications
MTB350	Med Temp Cure – 30% Bio-based	90	120 – 140	1 – 15 mins	Yes	171	190	Yes	Autoclave	Multi-purpose 30% bio content system with exceptional outlife. For use with all fibre types, including flax
<b>COMPONENT PREPREG – Versatile Temperature Cure</b>										
VTC401	General Purpose, Fast Cure Component Core Bondable	21	65 – 140	16 – 15 mins	Yes	143	151	Yes	Autoclave/Oven/Press	Versatile system. Low temp cure on lower cost large structures, but also with high temp "snap" cure capability
VTC410	General Purpose, Fast Cure Component	21	65 – 140	16 – 15 mins	Yes	190	206	Yes	Autoclave/Oven/Press	Versatile system. Low temp cure for lower cost, larger structure with increased service temperature
VTC212	Oven Component System	21	65 – 120	16 – 1	Yes	135	140	Yes	Oven	Versatile system with good Out of Autoclave processing for high quality surface finishes
OPS75	Oven Panel System	Up to 21	65 – 130	Consult Data Sheet	No	140	160	Yes	Autoclave/Oven	Automotive body panels with excellent retained surface finish once environmentally cycled
APS75	Autoclave Panel System	21	65 – 130	Consult Data Sheet	Yes	170	191	Yes	Autoclave	Automotive body panels with higher service temp
<b>COMPONENT PREPREG – High Service Temperature</b>										
HTC400	High Temp Cure, High Service Temp	30	180	2	No	263	272	Yes	Autoclave	High service temp Automotive and Aerospace structures
CEM100	Cyanate Ester, Very High Service Temp	21	120 – 135	3 – 2	Yes	345	400	No	Autoclave	High service temp Automotive and Space components with low-outgassing requirements
CEM160	Cyanate Ester, High Service Temp, Available on UD reinforcements	Up to 21	120 – 135	3 – 2	Yes	275	300	No	Autoclave	High service temp Automotive and Space components with low-outgassing requirements
<b>COMPONENT PREPREG – Flame Retardant</b>										
FRVC411	Flame Retardant, Core Bondable	21	65 – 120	16 – 1	Yes	155	176	Yes	Autoclave/Oven/Press	Flame retardant (can meet UL94 V0) Aerospace and Automotive structures
MTC510-1FRB	Flame Retardant, Med Temp Cure	30	80 – 120	16 – 1	No	130	148	Yes	Autoclave	General purpose flame retardant system
PS200	Flame Retardant, Bio-based	21	100 – 130	3 – 1	Consult SHD	350	390	No	Autoclave/Oven/Press	Bio-derived, highly flame retardant system for fire containment applications such as battery enclosures
FR308	Flame Retardant, Bio-based	21	120 – 130	1.5 – 1	No	175	240	No	Autoclave/Oven/Press	Bio-derived, highly flame retardant system for interior structures, typically to replace phenolic resins

**Disclaimer:** Technical advice, instruction or recommendation, whether verbal or in writing, is given in good faith but SHD Composites Ltd (SHD Composites) gives no warranty; express or implied. SHD Composites recommends that customers make their own tests to determine the quality and suitability of the product for their particular application and circumstances. Such testing should be performed under conditions as close as possible to those to which the final component may be subjected. Values listed here are for typical properties and should not be considered minimum or maximum, nor being used for specifications. To view our Terms and Conditions online, please visit [www.shdcomposites.com/terms-and-conditions](http://www.shdcomposites.com/terms-and-conditions).

\* Tg and service temperatures quoted in this Product Selector Guide are maximum values, possibly achieved after a post cure cycle depending on the product. Please consult Technical Data Sheets for details.

SHD Composites continuously reviews and updates its Product Selector Guide and Technical Data Sheets. Please ensure that you have the current version, by contacting your SHD Composites sales contact and quoting the issue date.

[www.shdcomposites.com](http://www.shdcomposites.com)  
+44 (0)1529 307629  
[sales@shdcomposites.com](mailto:sales@shdcomposites.com)

Issued 15th October 2021  
SHD/MISC/918  
Issue 11