



LTC210-1

Epoxy Tooling Prepreg

Introduction

LTC210-1 Prepreg is designed to cure at low temperatures whilst giving the potential for high temperature tooling. Typical initial cure cycles are 24 hrs at 115°F or 10 hrs at 130°F, followed by a 390°F post cure. LTC210-1 can be supplied on a variety of fabrics to meet your cost and manufacturing requirements.

LTC210-1 is a lower viscosity, higher tack variant of the standard LTC210 system.

Product variants: *LTC210-1B* *Black pigmented, default on all glass reinforcements*

Typical applications: *Low CTE tooling*

Key Features & Benefits

- Cure temperature from **115°F to 160°F**
- Service temperature up to **390°F** after post cure
- Low CTE and shrinkage
- Work life at 70°F: **3 days**
- Storage life at 0°F: **12 months**
- Very low VOC content – no added solvents during manufacture
- Excellent handleability in warmer conditions

Available Reinforcements (standard)

Carbon Surface ply	– 200g/m ² 2x2 twill		
Carbon Bulk ply	– 650g/m ² 2x2 twill	For standard 1:8:1 layup	Laminate thickness ~5.5mm
	– 1000g/m ² 2x2 twill	For 1:5:1 layup	Laminate thickness ~5.3mm
Glass Surface ply	– 300g/m ² 8 harness satin		
Glass Bulk ply	– 870g/m ² 2x2 twill	For standard 1:8:1 layup	Laminate thickness ~5.2mm

Note – other reinforcements available on request. Please enquire for details.



Storage & Out Life

This material should be kept frozen at 0°F. It must be kept sealed in a polythene bag which must not be opened until fully thawed to room temperature. If the material is not fully used, then the material must be resealed in the polythene bag to prevent moisture absorption.

Cure Cycles & performances

CURE CYCLE OPTIONS:

Temperature	Duration	Tg
115°F (minimum)	24 to 40 hours*	130°F
130°F	10 to 16 hours*	150°F
140°F	8 hours	160°F
160°F (maximum)	4 hours	175°F
390°F Post cure	8 hours	410°F

**The initial cure duration will depend on part and tool geometry, volume, mass, etc.
Please consult SHD Composites for details.*

- Curing Schedule is meant to be a guide only and is subject to local conditions.
- To avoid exotherm particular care must be taken with thick laminates.
Ramp rates must not exceed **2°F** per minute during **initial cure**.
Ramp rates must not exceed **1°F** per minute during **post cure** (free standing).

Volatile content	< 1.0%
Fibre volume fraction	50 to 60%
Voidage (autoclave cure)	< 1.0%


Cured Material Properties

Contact SHD for additional data.



Viscosity Profile

Measured using a rotational rheometer

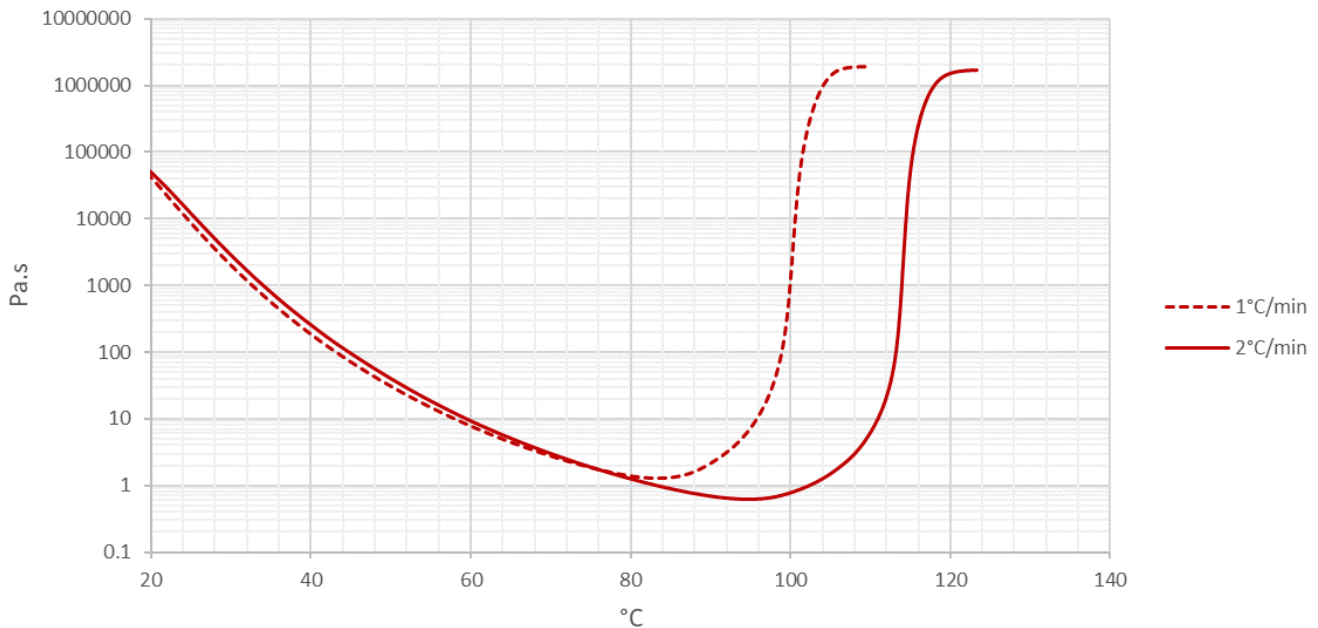

Health and Safety

This material contains epoxy resin which can cause allergic reactions with skin contact and must avoid repeated and prolonged skin contact.

Please refer to the product Safety Data Sheet before using this material. The following precautions must be taken when using epoxy resin prepregs:

- Overalls must be worn
- Impervious gloves must be worn.
- Curing schedule is meant to be as a guide only and is subject to local conditions.
- To avoid exotherm, particular care must be taken with thick laminates.
- Ramp rates must not exceed 2°F/min during initial cure and 1°F/min during post cure.

Disclaimer: Technical advice, instruction, data or recommendation, whether verbal or in writing, is given in good faith. The SHD company providing any such advice gives no warranty or guarantee, whether express or implied, in relation to such advice.

Customers must carry out their own tests and assessments as necessary in order to determine the quality and suitability of the product for their particular application and circumstances. Such testing should be performed under conditions identical to those to which the final component/product may be subjected. Values listed in any SHD document are for typical properties of the product or substance in question and are not intended to be used in establishing either statistical specifications nor engineering basis values. They do not constitute either minimum or maximum values for the product or substance in question.